



Laird Connectivity S9025PL/S9025PR are high-performance RFID antennas and the only UHF RFID antenna available to the market that offers no-compromise performance in a small package. At only 5.2" square, the antenna offers a gain specification of 5.5 dBi and axial ratio better than 2 dB. In effect, the antenna is providing the performance one would expect of a much larger antenna. The antenna is not only mechanically robust but is less likely to be exposed to excessive damage by virtue of its reduced size.

FEATURES AND BENEFITS

- Circularly polarized
- Low VSWR and axial ratio
- Rugged, ultra-heavy-duty construction
- IP67-rated
- Left-hand and right-hand CP versions
- Weather and UV resistant radome
- High performance in a small package
- Wide range of connector and cable options

APPLICATIONS

- Warehouse
- Distribution center
- Airports and hospitals
- Transit terminals
- Conveyer belt

ELECTRICAL SPECIFICATIONS

Antenna Model	S9025PR/S9025PL
Operating Frequency (MHz)	902 - 928
VSWR – Max	1.5:1
Gain (dBi)	5.5
Nominal Impedance (Ohms)	50
Max Power - Ambient 25°C (W)	10
Polarization	Circular RH or Circular LH
Horizontal Plane 3 dB Beamwidth	100°
Front-to-Back Ratio (dB)	8
Axial Ratio – Typical (dB)	2.0

MECHANICAL SPECIFICATIONS

Dimensions – length x width x height – mm (inches)	132.1 x 132.1 x 17.8 (5.2 x 5.2 x .71)
Weight – kg (lbs.)	.37 (.8)
Mounting Style	Threaded Stud 2x #10-32
Radome Material	White High Strength PC
Lightning Protection	DC Grounded
Connector Type	Type N-Female, RP-TNC Female, RP-SMA-Female, SMA-Female


ENVIRONMENTAL SPECIFICATIONS

Operating Temperature – °C (°F)	-30 to +70°C (-22 to +158°F)
Storage Temperature – °C (°F)	-40 to +85°C (-40 to +185°F)
Impact Resistance	1 lb. ball drop, 24"
Salt	MIL-STD-810
Vibration	MIL-STD-810
Shock	IEC 68-2-27
Humidity	IEC 68-2-27
Ingress Protection Rating	IP67

CONFIGURATION

PART NUMBER	POLARIZATION	CONNECTOR
S9025PLNF	LHCP	N Female
S9025PLRASMAF	LHCP	Right Angle, SMA Female
S9025PLRTN	LHCP	RP TNC
S9025PLSMF	LHCP	SMA Female
S9025PRNF	RHCP	N Female
S9025PRRASMAF	RHCP	Right Angle, SMA Female
S9025PRRTN	RHCP	RP TNC
S9025PRSMF	RHCP	SMA Female

RADIATION PATTERNS

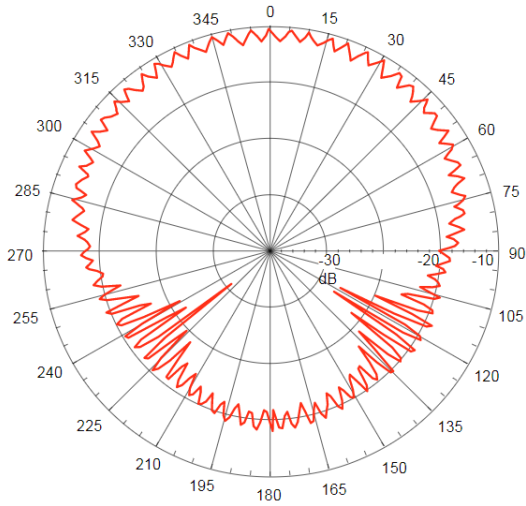

✓RoHS

Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2020 Laird Connectivity, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

sales@lairdconnect.com
support@lairdconnect.com
www.lairdconnect.com

